




OVERVIEW

Zemecs F155-UF series fiber optic cables are designed and manufactured to exceed performances specified by ITU-T G657.A2, IEC 60793, IEC 60794, ISO/IEC 11801 and TIA 568.3-D for FTTX and indoor applications.

The bend insensitive G657.A2 type fibers are filled into a LSOH compound which incorporates symmetrically placed non metallic strength members. The cables are delivered in 500, 1.000 and 2.000m. reels up to 4 fibers.

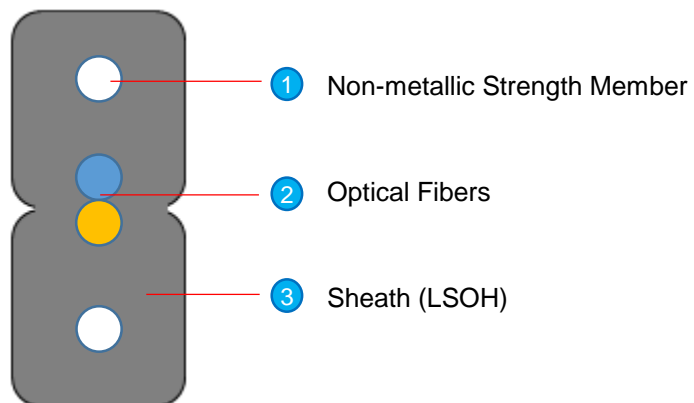

FEATURES

- Exceeds requirements of ITU-T G657.A2, IEC 60793, IEC 60974, ISO/IEC 11801 and TIA 568.3-D standards
- LSOH sheath
- Low bending radius
- Constructed up to 4 fibers

APPLICATIONS

- FTTx or GPON cabling
- Indoor cabling applications requiring protection against EMI

MATERIAL AND PHYSICAL SPECIFICATIONS

Cable Outer Diameter	1-4F: 2,0x4,1	1-4F(Stripe): 2.0x4,1	(± 0,1)	mm.
Sheath Material	LSOH (Low Smoke Zero Halogen)			
Strength Member Material	FRP			
Cable Weight	1-4F: 8,0	1-4F(Stripe): 10,0	(± %3)	kg./km.
Sheath Colour	Black (standard)			

COLOUR CODING OF FIBERS

Fiber #	1	2	3	4
Colour	Blue	Orange	Green	Red

ENVIRONMENTAL SPECIFICATIONS

Transportation and Storage Temperature	-20 / +50	°C
Installation Temperature	-10 / +40	°C
Operation Temperature	-20 / +50	°C
Relative Humidity	10 - 90, non-condensing	%



COMPLIANCE

Standards For Generic Cabling And Cabling Components		
• ITU-T G657.A2	• ISO/IEC 11801 V.2.1	
• IEC 60793-2	• EN 50173	
• IEC 60794-2-20	• ANSI/TIA/EIA-568.3-D	
Standards For The Restriction Of Use Of Hazardous Substances In Electrical And Electronic Equipments		
• 2011/65/EU (RoHS-2)		
Standards For Flammability, Halogen Acidity And Smoke Performance		
• IEC 60332-1-1:2004	• IEC 61034-2:2005+A1:2013	• EN 50399:2011+A1:2016
• IEC 60754-2:2011	• EN 50575: 2014 + A1: 2016	
Test Standards		
• Fiber Geometry	IEC 60793-1-20	
• Coating Geometry	IEC 60793-1-21	
• Fiber Proof	IEC 60793-1-30	
• Length Measurement	IEC 60793-1-22	

OPTICAL SPECIFICATIONS

Fiber Type	Singlemode ITU-T G657.A2	
Attenuation (@1.310 nm./1.550nm. / 1.625nm.)	0,34 / 0,20 / 0,24	dB/km., Max.
Chromatic Dispersion (@1.550 nm./1.625nm.)	17 / 22	ps/(nm.km.), Max.
Zero Dispersion Wavelength (λ_0)	$1.300 \leq \lambda_0 \leq 1.324$	Nm.
Zero Dispersion Slope (So)	0,091	ps/(nm ² .km.) Max.
Cable Cutoff Wavelength (λ_{cc})	1.260	nm., Max.

MECHANICAL SPECIFICATIONS

Tensile Strength (Installation/Operation)	80 / 40	N./100mm.
Crush Strength (Installation/Operation)	1.000 / 500	N./100mm.
Bending Radius (Installation/Operation)	60 / 30	mm., Min.

GEOMETRICAL SPECIFICATIONS

Mode Field Diameter (@1.310nm./1.550nm.)	9,20 / 10,40	μ m.
Cladding Diameter	125,0 \pm 1	μ m.
Core/Coating Concentricity Error	1	%, Max.
Coating Diameter	245 \pm 7	μ m.
Coating/Cladding Concentricity Error	12	μ m., Max.
Core/Cladding Concentricity Error	0,6	μ m., Max.

PART NUMBER CODING

Part Number	Product Description
F155-UF-JZA2-FFFY	Zemecs Singlemode G657.A2 Drop LSOH Fiber Optic Cable

J: Sheath Colour	
1	Black
2	Orange
3	Yellow
4	Aqua
5	White

FFF: Fiber Count	
1	1
2	2
4	4

Y: Length And Package Type	
S	500m. Reel
M	1.000m. Reel
L	2.000m. Reel

