




OVERVIEW

Zemecs T135Z series Category 6_A S/FTP LSOH Solid LAN cables are designed and manufactured to exceed performances specified by ANSI/TIA/EIA-568-2.D, EN 50173, ISO/IEC 11801, IEC 61156-5 and EN 50288-10-1 standards up to 500 Mhz. Four twisted pairs of 23 AWG solid copper conductors are foiled individually which are then braided by tinned copper or aluminum manganese. Products with LSOH jacket are delivered in packages of 305, 500 and 1.000m. reels.

Zemecs Category 6_A S/FTP LAN cables support network speeds up to 10 Gigabit/s. Their CPR compliance are certificated through third parties and covered within Zemecs' 25 year system performance guarantee programme.

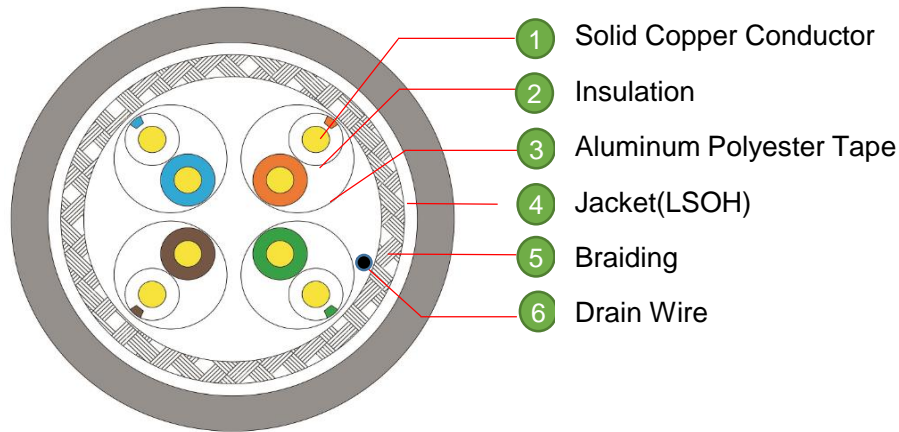

Drawing is not scaled.

FEATURES

- Exceeds requirements of ANSI/TIA/EIA-568-2.D, EN 50173, ISO/IEC 11801, IEC 61156-5 and EN 50288-10-1 cabling standards for channels, links and components
- Supports PoE and PoE+ applications
- Error free performance up to 10 Gigabit Ethernet at 500 Mhz.
- High ACR values increasing signal quality and network connection speed
- Guaranteed stable performance at all frequencies thanks to aluminum foil reducing impact of EMI
- Offered with different jacket colour and packages
- Certificated by Delta(Force Technology)

APPLICATIONS

- 10G Base-T 10 Gigabit Ethernet
- 1000 Base-T Gigabit Ethernet
- 100 Base-TX Fast Ethernet
- 10 Base-T Ethernet
- 622 Mbps ATM
- 155 Mbps ATM
- ISDN
- 4/16 Mbps Token Ring
- 100 Mbps TP-PMD
- Broadband and baseband video

MATERIAL AND PHYSICAL SPECIFICATIONS

Conductor	Material	100% Bare Annealed Copper
	Size	4x2x23 AWG
	Colour	Blue x Blue/White Strip
		Orange x Orange/White Strip
		Green x Green/White Strip
		Brown x Brown/White Strip
	Insulation	Polyolefin
	Insulation Diameter	1,33 ± 0,05 mm.
Pair Insulation	Aluminum Polyester Tape	
Braid	Tinned Copper Or Aluminum Manganese, Min. 30%	
Jacket	Material	LSOH (Low Smoke Zero Halogen)
	Outer Diameter	7,30 ± 0,15 mm.
Drain Wire	Material	0,45mm. Tinned Annealed Copper

* Part number for products manufactured before 31.12.2017 is T136ZMXY



COMPLIANCE

Generic Cabling And Cabling Components Standards - Category 6 _A Requirements	
• ISO/IEC 11801-1:2017 (V.1.0) , ISO/IEC 11801-2:2017 (V.1.0)	
• IEC 61156-5:2012 (V.2.1)	
• EN 50173-1:2018	
• EN 50173-2:2018	
• EN 50288-10-1:2013	
• ANSI/TIA-568-2.D:2018	
Flammability, Halogen Acidity And Smoke Performance	
• IEC 60332-1-1:2015 (V.1.1), IEC 60332-1-2:2015 (V.1.1)	
• IEC 60754-1:2011 (V.3.0), IEC 60754-2:2011 (V.2.0)	
• IEC 61034-1:2013 (V.3.1), IEC 61034-2:2013 (V.3.1)	
• EN 50575: 2014 + A1: 2016, EN 50399:2011+A1:2016	
Standards For The Restriction Of Use Of Hazardous Substances In Electrical And Electronic Equipments	
• 2011/65/EU (RoHS-2)	
Certification	
• Certified by Delta (Force Technology)	

TRANSMISSION PERFORMANCE

FREQUENC Y (Mhz.)	INSERTION LOSS (dB., max)	RETURN LOSS (dB., min.)	NEXT (dB., min.)	PSNEXT (dB., min.)	ACR-F (dB., min.)	PS ACR-F (dB., min.)
1	1,9	27,1	77,8	74,8	70,9	69,9
4	3,7	31,9	77,8	74,8	61,7	61,7
8	4,9	33,0	77,8	74,8	57,0	56,0
10	5,8	26,3	77,8	74,8	54,7	54,0
16	7,4	28,1	77,7	74,7	51,1	50,1
20	8,2	27,7	77,7	74,7	50,1	48,9
25	9,3	26,9	77,7	74,7	48,3	47,1
31,25	10,3	28,5	24,0	74,7	48,0	46,8
62,5	14,9	29,9	75,2	72,2	51,5	49,3
100	18,8	25,3	72,1	69,1	36,2	36,1
200	26,9	28,5	68,8	65,8	36,2	35,2
250	30,7	26,3	64,6	61,6	26,2	26,1
500	45,0	18,5	61,6	58,6	18,8	18,8

ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS

Transportation and Storage Temperature	-20 / +80	°C
Installation Temperature	-20 / +60	°C
Operation Temperature	-20 / +60	°C
Relative Humidity	10 - 90, Non-condensing	%

MECHANICAL SPECIFICATIONS

Tensile Strength	60	N./mm. ² , Max.
Cold Bend Test @20 ± 2°C x 4 hour	No cracks occur	
Jacket Tensile Strength @ 100°C x 168 hour		
Before/After Aging	1.300 / 1.105	Psi,Min.
Jacket Elongation @ 100°C x 168 hour		
Before/After Aging	100 / 50	%,Min.
Insulation Tensile Strength@ 100°C x 48 hour		
Before/After Aging	2.400 / 1.800	Psi,Min.
Insulation Elongation @ 100°C x 48 hour		
Before/After Aging	300 / 225	%,Min.
Bending Radius		
Installation/Operation	8 / 4 x O.D.	mm.

PART NUMBER CODING

Part Nr.	Product Description
T135ZMXY	Zemecs Category 6 _A S/FTP 4x2x23# LSOH Solid LAN Cable

M: Jacket Colour					
1	Light Grey	4	Red	7	Yellow
2	Black	5	Green	8	Orange
3	White	6	Blue	9	Violet
X: Length					
1	305m.	2	500m.	3	1.000m.
Y: Package Type					
R	Reel				

