



OVERVIEW

Zemecs T464D12B Category 5e STP keystone jacks exceed ISO/IEC 11801:2011(Ed.2.2) Class D, EN 50173, ANSI/TIA/568-2.D and IEC 60603-7 requirements for Gigabit structured cabling systems. The solderless PCB design guarantees stable signal quality at all frequencies.


T464D12B series jacks are toolless and they fit into Zemecs blank patch panels and faceplates.

FEATURES

- Exceeds requirements of ANSI/TIA/EIA-568-2.D, EN 50173, ISO/IEC 11801-1:2017, IEC 60603-7-51 and IEC 60512-99 cabling standards for channels, links and components
- Error free performance up to 100 Mhz. at 1 Gigabit Ethernet
- TIA 568 A/B Wiring

APPLICATIONS

- 1000 Base-T Gigabit Ethernet
- 100 Base-TX Fast Ethernet
- 10 Base-T Ethernet
- 622 Mbps ATM
- 155 Mbps ATM
- ISDN
- 4/16 Mbps Token Ring
- 100 Mbps TP-PMD
- Broadband and baseband video

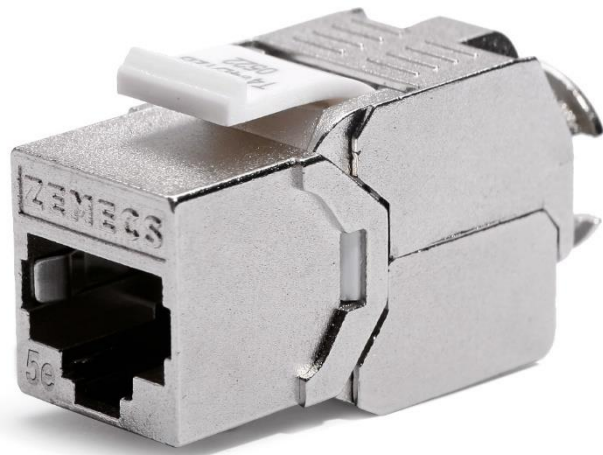

MATERIAL AND PHYSICAL SPECIFICATIONS

Housing Material	Anti Corrosion Nickel Plated Zinc Alloy
Rear Housing Material	Anti Corrosion Nickel Plated Zinc Alloy
Bracket Material	Anti Corrosion Nickel-Silver Zinc Alloy
Plug Contact Surface	50µ" Gold Plate Over 100µ" Nickel
IDC Terminal	100µ" Tinned Phosphorous Bronze Over Nickel Undercoat
PCB	FR4, 1,6mm. Thickness
Contact Holder / Jack Latch	PC,UL94V-0 / PC+ABS,UL94V-0.
IDC Contact Angle	180°
Colour	Metallic



COMPLIANCE

Standards For Generic Cabling And Cabling Components - Category 5e Plug Requirements

- ISO/IEC 11801-1:2017 (V.1.0)
- ISO/IEC 11801-2:2017 (V.1.0)
- EN 50173-1:2018, EN 50173-2:2018
- IEC 60603-7-3: 2010 (V.2.0)
- IEC 60512-99-002:2019
- ANSI/TIA-568.2-D:2018

Standards For The Restriction Of Use Of Hazardous Substances In Electrical And Electronic Equipments

- 2011/65/EU (RoHS-2)

TRANSMISSION PERFORMANCE

FREQUENCY (Mhz.)	ATTENUATION (dB., max.)	RETURN LOSS (dB., min.)	NEXT (dB., min.)	PSNEXT (dB., min.)	ACRF (dB., min.)
1	1,9	75,4	80,5	72,9	73,3
4	3,7	65,0	79,1	61,2	60,6
8	5,3	62,5	67,5	60,0	49,0
10	6,0	55,8	66,6	54,4	48,7
16	7,7	55,3	62,3	51,4	43,6
20	8,7	53,1	58,9	49,9	44,9
25	9,7	49,8	56,3	48,4	44,2
31,25	11,0	49,8	52,5	46,5	39,2
62,5	16,0	43,2	48,6	39,3	33,4
100	20,7	38,4	42,9	35,3	30,1

Typical performance for TIA Channel is given. Actual performance may vary depending on installation and environmental conditions.

ENVIRONMENTAL SPECIFICATIONS

Transportation & Storage Temperature	-40 / +70	°C
Installation Temperature	-20 / +60	°C
Operation Temperature	-10 / +60	°C
Relative Humidity	10 - 93, Non-condensing	%

MECHANICAL SPECIFICATIONS

Compatible Plug Type	8P8C	RJ-45
Insertion Life	750	Cycles (IEC-60603-7)
Durability(Termination Cycles)	200	Cycles, Max.
Plug-Jack Contact Force	100	g., Max. (FCC Compatible RJ-45 Plug)
Plug-Jack Coupling Force	8	N., Max. (all wires)
Contact Compatibility	22-26 AWG	Solid or stranded
Suitable Termination Tool	Toolless	

ELECTRICAL SPECIFICATIONS

Insulation Resistance (@500 VDC)	500	MΩ, Min.
DC Resistance (@20 °C)	0,1	Ω, Max.
Contact Resistance	20	mΩ, Max.
Termination Resistance	2,5	mΩ, Max.
Current Rating	2	A, Max.
Dielectric Strength (@60 Hz. / 1min.)	1.000	VAC Rms
Propagation Delay Skew	1,25	ns., Max.
Coupling Attenuation	60	dB., Max.

PART NUMBER CODING

Part Nr.	Product Description
T464D12B	Zemecs Category 5e STP 180° Toolless Keystone Jack

