



OVERVIEW

Zemecs T483B12Y series Category 6_A UTP keystone jacks exceed ISO/IEC 11801:2011(Ed.2.2) Class E, EN 50173, ANSI/TIA/568.2-D and IEC 61935-2 requirements for 10 Gigabit structured cabling systems. The solderless PCB design guarantees stable signal quality at all frequencies.


The products fit into Zemecs unloaded blank patch panels and faceplates and may be terminated via T855A special termination tool. They are ideal for use in structured cabling projects requiring high performance without third party certification.

FEATURES

- Exceeds requirements of ANSI/TIA/EIA-568.2-D, EN 50173, ISO/IEC 11801-1:2017 and IEC 61935-2 cabling standards for channels, links and components
- Supports PoE and PoE+ applications
- Error free performance up to 500 Mhz. at 10 Gigabit Ethernet
- TIA 568 A/B Wiring
- Choice of different colours

APPLICATIONS

- 10G Base-T 10 Gigabit Ethernet
- 1000 Base-T Gigabit Ethernet
- 100 Base-TX Fast Ethernet
- 10 Base-T Ethernet
- 622 Mbps ATM
- 155 Mbps ATM
- ISDN
- 4/16 Mbps Token Ring
- 100 Mbps TP-PMD
- Broadband and baseband video

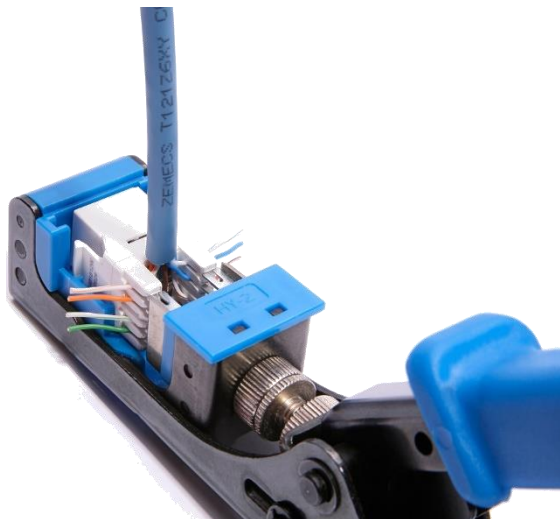

MATERIAL AND PHYSICAL SPECIFICATIONS

Housing Material	ABS, UL94V-0
Plug Contact Surface	50µ" Gold Plate Over 100µ" Nickel
IDC Terminal	100µ" Tinned Phosphorous Bronze Over Nickel Undercoat
PCB	FR4, 1,6mm. Thickness
Contact Holder	PC, UL94V-0
IDC Contact Angle	180°
Colour	White (standard), others optional



COMPLIANCE

Standards For Generic Cabling And Cabling Components - Category 6_A Plug Requirements

- ISO/IEC 11801-1:2017 (V.1.0)
- ISO/IEC 11801-2:2017 (V.1.0)
- EN 50173-1:2018, EN 50173-2:2018
- IEC 60603-7-41: 2010 (V.1.0)
- ANSI/TIA-568.2-D:2018

Standards For The Restriction Of Use Of Hazardous Substances In Electrical And Electronic Equipments

- 2011/65/EU (RoHS-2)

TRANSMISSION PERFORMANCE

FREQUENCY (Mhz.)	ATTENUATION (dB., max.)	RETURN LOSS (dB., min.)	NEXT (dB., min.)	PSNEXT (dB., min.)	ACRF (dB., min.)
1	1,1	31,5	94,0	91,3	75,4
4	2,0	23,8	81,5	82,3	63,3
8	2,8	29,2	77,8	74,1	57,2
10	3,1	27,2	80,6	72,6	55,2
16	4,0	26,3	75,7	73,5	52,6
20	4,5	27,5	72,1	70,5	51,6
25	5,0	28,1	69,6	66,6	49,6
31,25	5,6	25,4	68,3	69,6	47,1
62,5	8,1	21,3	63,3	63,1	41,1
100	10,4	24,0	60,7	57,2	39,6
200	15,1	21,5	47,4	46,6	30,1
250	17,1	21,2	43,8	43,9	27,7
500	25,1	16,5	34,7	30,1	25,9

ENVIRONMENTAL SPECIFICATIONS

Transportation & Storage Temperature	-40 / +70	°C
Installation Temperature	-20 / +60	°C
Operation Temperature	-10 / +60	°C
Relative Humidity	10 - 93, Non-condensing	%

MECHANICAL SPECIFICATIONS

Compatible Plug Type	8P8C	RJ-45
Insertion Life	750	Cycles (IEC-60603-7)
Durability(Termination Cycles)	200	Cycles, Max.
Plug-Jack Contact Force	100	g., Max. (FCC Compatible RJ-45 Plug)
Plug-Jack Coupling Force	8	N., Max. (all wires)
Contact Compatibility	22-26 AWG	Solid or stranded
Suitable Termination Tool	110/Krone	May also be used with Zemecs T855A

ELECTRICAL SPECIFICATIONS

Insulation Resistance (@500 VDC)	500	MΩ, Min.
DC Resistance (@20 °C)	0,1	Ω, Max.
Contact Resistance	20	mΩ, Max.
Termination Resistance	2,5	mΩ, Max.
Current Rating	2	A, Max.
Dielectric Strength (@60 Hz. / 1min.)	1.000	VAC Rms
Propagation Delay Skew	1,25	ns., Max.
Coupling Attenuation	60	dB., Max.

PART NUMBER CODING

Part Nr.	Product Description
T483B12Y	Zemecs Category 6 _A UTP 180° 110 Type Keystone Jack
Y	A or W : White, C or K : Black, Y : Yellow G : Green, L : Blue O : Orange R : Red V : Violet